

Coaxial Fixed Attenuator


SMA Series

DC-26.5GHz


2 WATTS

Electrical Properties:

Frequency Range:	DC - 26.5GHz
Attenuation:	0 - 10, 12, 15, 20, 30dB
Attenuation Accuracy:	0 - 6dB : $\pm 0.3\text{dB}$ 7 - 20dB : $\pm 0.5\text{dB}$ 21 - 30dB : $\pm 0.75\text{dB}$
VSWR:	DC - 4GHz : ≤ 1.15 4 - 8GHz : ≤ 1.20 8 - 12.4GHz : ≤ 1.25 12.4 - 18GHz : ≤ 1.35
Input Power:	2 Watts Avg. @25°C
Peak Power:	250 Watts
Impedance:	50 Ohms
Temperature Range:	-65°C to +125°C
Connector Type:	SMA
Center Conductor:	Beryllium Copper Gilt
Material:	Stainless Steel

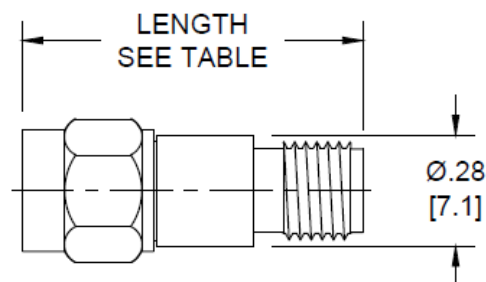


A STYLE

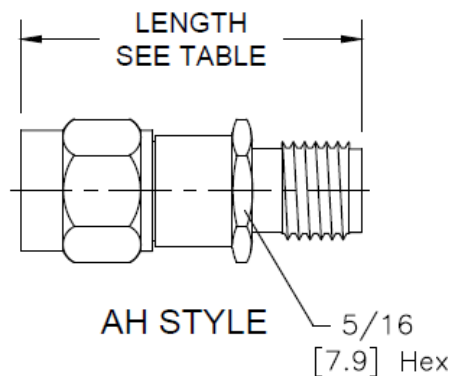

AH STYLE

Selection Guide:

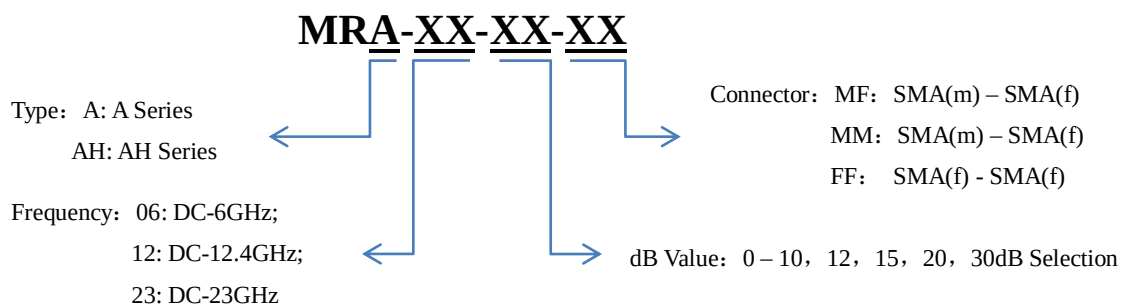

Remarks: Design specifications are subject to change without notice.